

BV-11F-PN16/40夾片式法蘭球閥


產品特徵：

SPECIFICATIONS

- *公稱壓力：1/2" ~8" PN16/40
Working Pressure: 1/2" ~8" PN16/40
- *適用溫度範圍：-20 ~ 232°C
Temperature Range: -20 ~ 232°C
- *防爆中軸 Blow-Out-Proof Stem Design
- *防靜電裝置 Antistatic Device
- *法蘭標準：DIN2633/2635
Flange Dimensions: DIN2633/2635
- *精密鑄造 Investment Casting
- *固溶化處理 Solution Treatment
- *全流量 Full port
- *操作方式：手柄/執行器
Operator: Lever/Actuator



型號：BV-11F-PN16/40

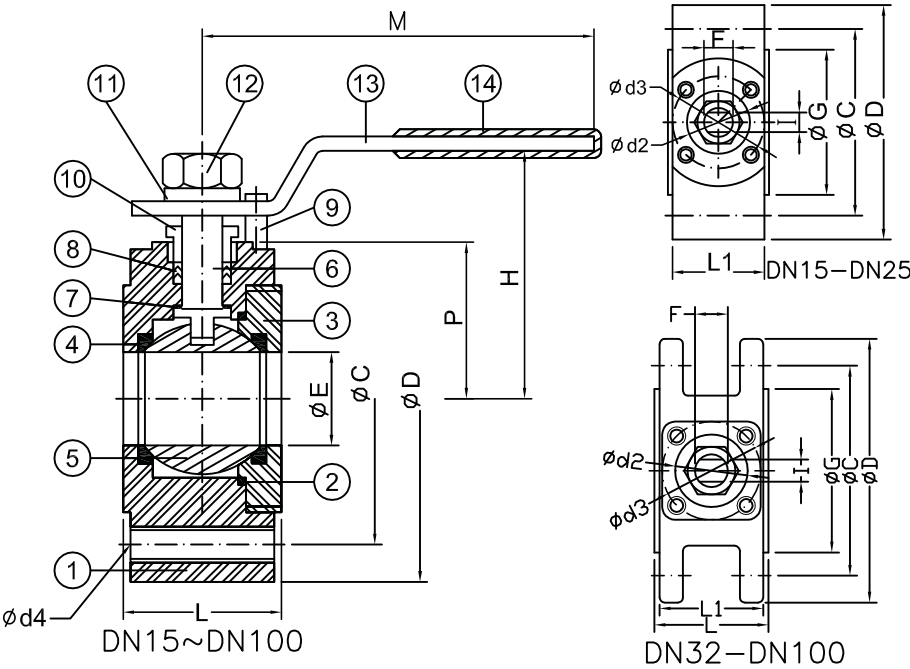



MATERIALS LIST

ITEM	PART NAME DN15~DN100	MATERIAL	
		1.4408	WCB
1	BODY	1.4408	1.0619
2	GASKET	PTFE	PTFE
3	RING NUT	1.4408	1.0619
4	SEATS	PTFE	PTFE
5	BALL	1.4408	1.4308
6	STEM	1.4401	1.4301
7	STEM SEAL	PTFE	PTFE
8	STEM PACKING	PTFE	PTFE
9	STOPPER	1.4301	1.4301
10	GLAND NUT	1.4301	1.4301
11	SPRING WASHERS	1.4301	1.4301
12	NUT	1.4301	1.4301
13	HANDLE	1.4301	1.4301
14	PLASTIC COVER	PLASTIC	PLASTIC

DIMENSIONS

Unit:mm

DN	PN	ISO-5211	C	D	d2	d3	d4	E	F	G	H	I	L	L1	M	P
15	PN40	F03	65	95	25	36	M12*4	15	8.0	48	63	5	35	31	105	32
20	PN40	F03	75	105	25	36	M12*4	20	8.0	58	66	5	38	34	105	35
25	PN40	F04	85	115	30	42	M12*4	25	11.2	68	76	8	42	38	158	39
32	PN40	F04	100	140	30	42	M16*4	32	11.2	78	85	8	50	46	158	50
40	PN40	F05	110	150	35	50	M16*4	38	12.7	88	110	9	60	54	183	54
50	PN40	F05	125	165	35	50	M16*4	50	12.7	102	118	9	80	64	183	63
65	PN16-40	F07	145	185	55	70	M16*4	65	20.0	122	131	12	94	88	243	79
80	PN16-40	F07	160	200	55	70	M16*8	80	20.0	138	152	12	118	112	243	87
100	PN16-40	F10	180	220	70	102	M16*8	100	24.0	158	182	18	140	134	328	108

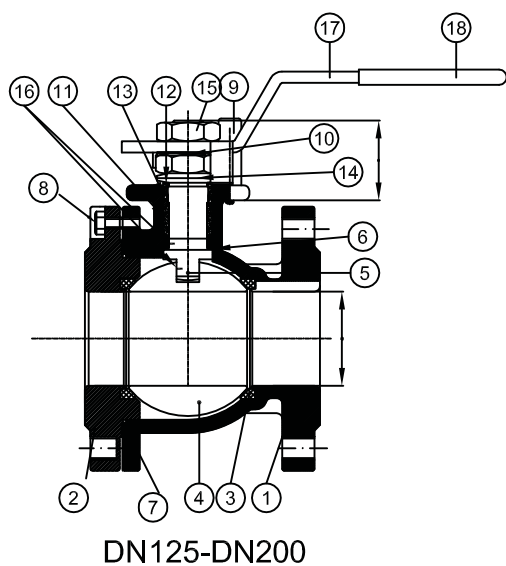

MATERIALS LIST

ITEM	PART NAME DN125~DN200	MATERIAL	
		1.4408	1.0619
1	BODY	1.4408	1.0619
2	END CAP	1.4408	1.0619
3	SEATS	PTFE	PTFE
4	BALL	1.4408	1.4308
5	STEM	1.4401	1.4301
6	GASKET	PTFE&50%SUS	
7	JOINT GASKET	PTFE	PTFE
8	BOLTS	1.4301	1.4301
9	STOPPER	1.4301	1.4301
10	LOCK WASHER	1.4301	1.4301
11	SEAL	PTFE	PTFE
12	GLAND BUSH	PTFE	PTFE
13	PACKING GLAND	1.4301	1.4301
14	BELLEVILLE	1.4301	1.4301
15	LEVER NUT	1.4301	1.4301
16	GROUNDING DEVICE	1.4401	1.4401
17	HANDLE	1.4301	1.4301
18	PLASTIC COVER	PVC	PVC

DIMENSION

unit:mm

DN	PN	ISO-5211	C	D	d2	d3	d4	E	F	G	H	I	L	L1	M	P
125	PN16-40	F10	210	250		98.2	M16*8	125	28.0	188		22	200	194	328	169
150	PN16-40	F12	240	285		120	M20*8	150	36.0	212		27	240	234	400	208
200	PN16-40	F12	295	340		120	M20*12	200	36.0	268		27	310	304	500	238