

BVR-136T/B/S三片式不銹鋼高壓球閥

產品特徵：

SPECIFICATIONS

*公稱壓力：1/4" ~2" 420kgf/cm2(BVR-136)

1/4" ~2" 210kgf/cm2(BVR-133)

Working Pressure: 1/4" ~2" 6000PSI(BVR-136)

1/4" ~2" 3000PSI(BVR-133)

*適用溫度範圍：-20 ~ 260°C

Temperature Range: -20 ~ 260°C

*防爆中軸 Blow-Out Proof Stem Design

*防火安全设计 Fire safe


*连接形式：内螺纹/对焊/承插焊

End Types: Female Threaded/Butt Weld/Socket Weld

注：如需全通徑高壓球閥或者金屬硬密封高壓球閥，請另行詢價。



型號：BVR-136(133)T/B/S

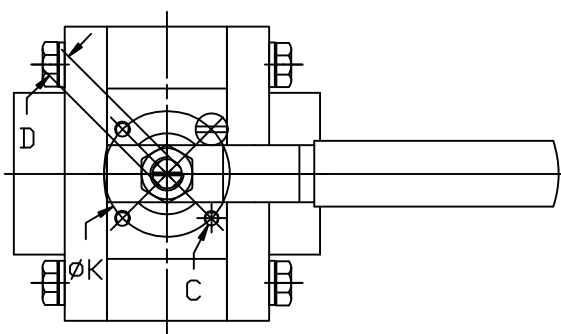

MATERIALS LIST

No.	PART NAME	MATERIALS
1	BODY	AISI316
2	CAP	AISI316
3	BALL	ASTM A351 Gr.CF8M
4	BALL SEATS	Derlin/PEEK
5	STEM	17-4PH
6	THRUST WASHER	Derlin/PEEK
7	END SEALS	Derlin/Graphite
8	STEM PACKING	25% Carbon Filled
9	THRUST WASHER	TFM1600
10	GLAND BUSH	SS304
11	BELLEVILLE WASHER	SUS304-CSP
12	STOP	SS304
13	HANDLE NUT	SS304
14	HANDLE	SS304
15	HANDLE SLEEVE	VINYL GRIP
16	O-RING	VITON
24	END SEALS	PTFE

DIMENSION

unit: mm

SIZE	d	L	E	H	D	K	C
1/4"	9.5	85	151	61	9	36	M5
3/8"	11.6	85	151	61	9	36	M5
1/2"	12.5	85	151	61	9	36	M5
3/4"	16	89	151	67	9	42	M5
1"	20	102	183	81	9	42	M5
1-1/4"	25	111	183	97	11	42	M5
1-1/2"	32	119	285	113	14	50	M6
2"	38	126	285	117	14	50	M6

