

DPC-16/40 德標對夾式蝶型逆止閥

產品特徵：

SPECIFICATIONS

*公稱壓力：2" ~20" PN16/PN25/PN40

Working Pressure: 2" ~20" PN16/PN25/PN40

*適用溫度範圍：-20 ~ 232°C

Temperature Range: -20 ~ 232°C

*連接方式: 對夾 End types: Wafer

*精密鑄造 Investment Casting



型號：DPC-16/40

MATERIALS LIST

ITEM	零件名稱PART NAME	材質MATERIAL
1	BODY	CF8M/CF8
2	PLATE	CF8M/CF8
3	SEAT	VITON/EPDM/NBR/METAL
4	SPRING	SUS316-WPA
5	HINGE PIN	SUS316/SUS304
6	STOP PIN	SUS316/SUS304
7A	PLUG	A105
7B		
8	BODY BEARING	SS316
9	PLATE BEARING	SS316
10	EYE-BOLT	A105

DIMENSIONS

Unit:mm

SIZE	ΦA			ΦB	C			P.C.D		
	PN16	PN25	PN40		PN16	PN25	PN40	PN16	PN25	PN40
2"	105	105	105	60	60	60	60	125	125	125
2-1/2"	124	124	124	73	67	67	67	145	145	145
3"	137	137	137	89	73	73	73	160	160	160
4"	164	170	170	114	73	73	73	180	190	190
5"	194	196	196	141	86	86	86	210	220	220
6"	220	226	226	168	98	98	98	240	250	250
8"	275	286	293	219	127	127	127	295	310	320
10"	331	343	355	274	146	146	146	355	370	385
12"	386	403	420	324	181	181	181	410	430	450
14"	446	460	477	356	184	184	222	470	490	510
16"	498	517	549	406	191	191	232	525	550	585
18"	558	567	574	457	203	203	264	585	600	610
20"	620	627	631	508	219	219	292	650	660	670

Unit:mbar

開啟壓力

DN	50	65	80	100	125	150	200	250	300	350	400
開啟壓力	25	30	27	25	25	25	22	32	25	47	47

注意：逆止閥必須安裝在離泵口大約5*DN以外位置，避免產生振盪。

DPC-150/300 美標對夾式蝶型逆止閥

產品特徵：

SPECIFICATIONS

*公稱壓力：2" ~20" 150LB/300LB

Working Pressure: 2" ~20" 150LB/300LB

*適用溫度範圍：-20 ~ 232°C

Temperature Range: -20 ~ 232°C

*連接方式: 對夾 End types: Wafer

*精密鑄造 Investment Casting




型號：DPC-150/300

MATERIALS LIST

ITEM	零件名稱PART NAME	材質MATERIAL
1	BODY	CF8M/CF8
2	PLATE	CF8M/CF8
3	SEAT	VITON/EPDM/NBR/METAL
4	SPRING	SUS316-WPA
5	HINGE PIN	SUS316/SUS304
6	STOP PIN	SUS316/SUS304
7A	PLUG	A105
7B		
8	BODY BEARING	SS316
9	PLATE BEARING	SS316
10	EYE-BOLT	A105

DIMENSIONS

Unit:mm

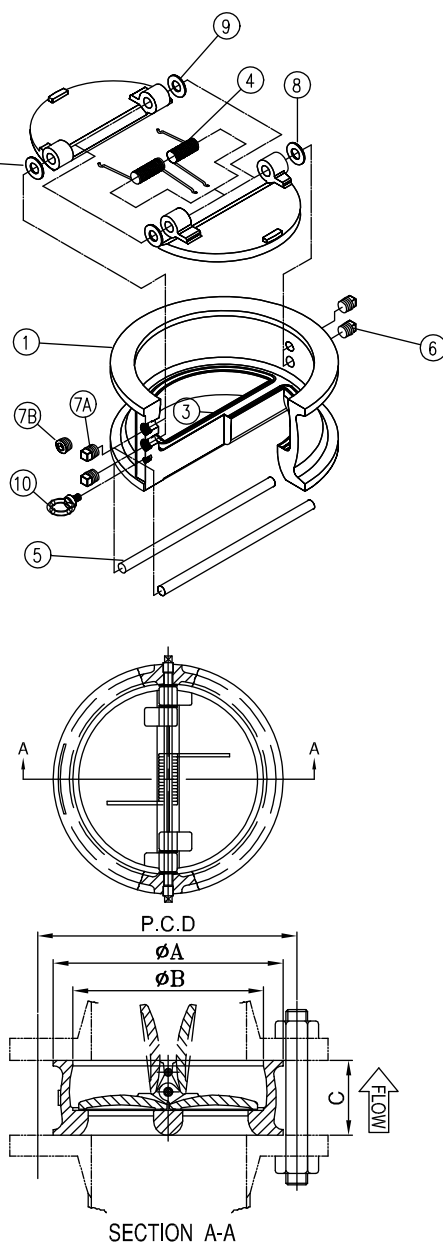

SIZE	ΦA		ΦB	C		P.C.D	
	150	300		150	300	150(RF)	300(RF)
2"	105	111	60	60	60	120.5	127
2-1/2"	124	130	73	67	67	139.5	149
3"	137	149	89	73	73	152.5	168
4"	175	181	114	73	73	190.5	200
5"	197	216	141	86	86	216	235
6"	222	251	168	98	98	241.5	270
8"	279	308	219	127	127	298.5	330
10"	340	362	274	146	146	362	387.5
12"	410	422	324	181	181	432	451
14"	451	486	356	184	222		
16"	514	540	406	191	232		
18"	549	597	457	203	264		
20"	606	654	508	219	292		

開啟壓力

Unit:mbar

DN	50	65	80	100	125	150	200	250	300	350	400
開啟壓力	25	30	27	25	25	25	22	32	25	47	47

注意：逆止閥必須安裝在離泵口大約5*DN以外位置，避免產生振盪。