

GAV-200螺紋閘閥

產品特徵：

SPECIFICATIONS

*公稱壓力：1/2" ~ 2" 16Kgf/cm²

Working Pressure: 1/2" ~ 2" 200PSI WOG

*適用溫度範圍：-20 ~ 180°C

Temperature Range: -20 ~ 180°C


*連接方式：內螺紋BSPT/NPT

End types: Female Threaded BSPT/NPT

*精密鑄造 Investment Casting



型號：GAV-200

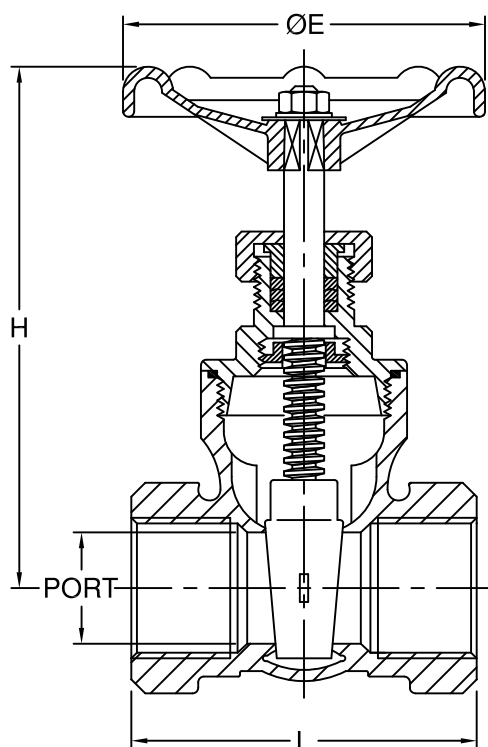

MATERIALS LIST

NO.	部件名稱	PART NAME	MATERIAL
1	閥體	BODY	CF8M
2	閥板	DISC	CF8M
3	中軸	STEM	SS316
4	閥蓋	BONNET	CF8M
5	填料	GASKET PACKING	PTFE.
6	止推墊片	STOP RING	SS304
7	閥杆架	STEM HOLDER	SS316
8	閥杆填料	STEM PACKING	PTFE
9	螺母	NUT	SS304
10	填料壓蓋螺母	GLAND NUT	SS316
11	手輪	HANDLE WHEEL	MICO STEEL
12	銘牌	NAME PLATE	ALUMINUM
13	手輪墊片	HANDLE WHEEL WASHER	SS304
14	手輪螺母	HANDLE WHEEL NUT	SS304

DIMENSIONS

unit:mm

SIZE		L	φE	H	PORT
DN15	1/2"	55.0	70.0	92.0	15.0
DN20	3/4"	60.0	70.0	97.0	20.0
DN25	1"	65.0	80.0	108.5	25.0
DN32	1-1/4"	75.0	80.0	123.5	32.0
DN40	1-1/2"	85.0	90.0	146.0	38.0
DN50	2"	95.0	100.0	162.0	50.0