

GLV-200內螺紋球型閥

產品特徵：

SPECIFICATIONS

*公稱壓力：1/4" ~ 2" 16Kgf/cm²

Working Pressure: 1/4" ~ 2" 200PSI WOG

*適用溫度範圍：-20 ~ 180°C

Temperature Range: -20 ~ 180°C

*精密鑄造 Investment Casting

*連接方式: 內螺紋BSPT/NPT


End types: Female Threaded BSPT/NPT



型號：GLV-200

MATERIALS LIST

NO.	PART NAME	材質 MATERIAL
1	本體 BODY	ASTM A351 Gr.CF8M
4	閥板 DISC	SS316
5	中軸 STEM	SS316
9	閥蓋 BONNET	ASTM A351 Gr.CF8M
11	閥體密封 BODY SEAL	PTFE.
14	填料 STEM PACKING	PTFE.
15	中口壓蓋 GLAND	SS304
16	壓蓋螺母 GLAND NUT	ASTM A351 Gr.CF8M
19	手輪 HANDWHEEL	ADC12
23	墊片 WASHER	SS316
24	手輪螺母 HANDLE NUT	SS304
25	銘牌 NAME PLATE	ALUMINUM

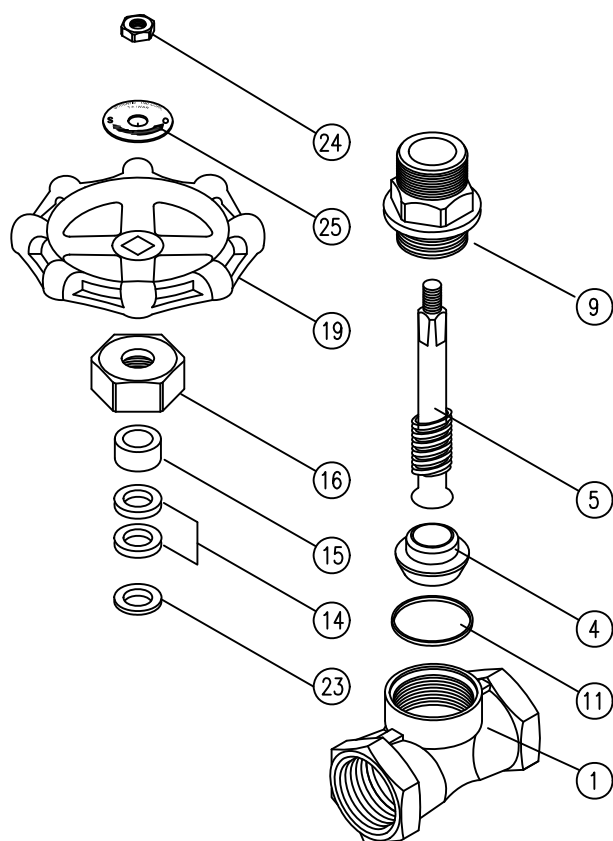

DIMENSIONS

unit:mm

SIZE		L	ΦE	H _(OPEN)	H _(CLOSE)	D
DN8	1/4"	52.0	70.0	79.0	73.0	12.0
DN10	3/8"	52.0	70.0	79.0	73.0	12.0
DN15	1/2"	52.0	70.0	79.0	73.0	12.0
DN20	3/4"	60.0	70.0	94.0	85.0	15.0
DN25	1"	72.0	80.0	101.0	91.0	20.0
DN32	1-1/4"	81.0	80.0	119.0	103.0	25.0
DN40	1-1/2"	90.0	90.0	142.0	124.0	32.0
DN50	2"	101.0	100.0	159.0	139.0	40.0

