

SC-16F 旋啟式法蘭逆止閥

產品特徵：

SPECIFICATIONS

*公稱壓力：1/2" ~12" 16Kgf/cm2

Working Pressure: 1/2" ~12" PN16

*殼體厚度標準：ANSI B16.34

SHELL WALL THICKNESS: ANSI B16.34

*結構長度尺寸規範：DIN 3202

Face to Face Dimensions: DIN 3202

*法蘭端尺寸規範：DIN 2501

End Flange Dimensions: DIN 2501 PN16

*壓力試驗規範：API 598


Pressure Test: API 598



型號：SC-16F

MATERIALS LIST

ITEM	零件名稱PART NAME	材質MATERIAL		
1	BODY	1.4308	1.4408	1.4409
2	COVER	1.4308	1.4408	1.4409
3	DISC	1.4308	1.4408	1.4409
4	SWING ARM	1.4308	1.4408	1.4409
5	WASHER	A276-304/316/316L		
6	GASKET	V#1500/GRAPHITE/PTFE		
7	HINGE PIN	A276-304/316/316L		
8	PLUG	A276-304/316/316L		
9	SPRING WASHER	A276-304		
10	EYE BOLT	A36+ZN		
11	COVER BOLT	A1943-B8		
12	NUT	A194-8		
13	PIN	A276-304/316/316L		
14	COVER	PE		

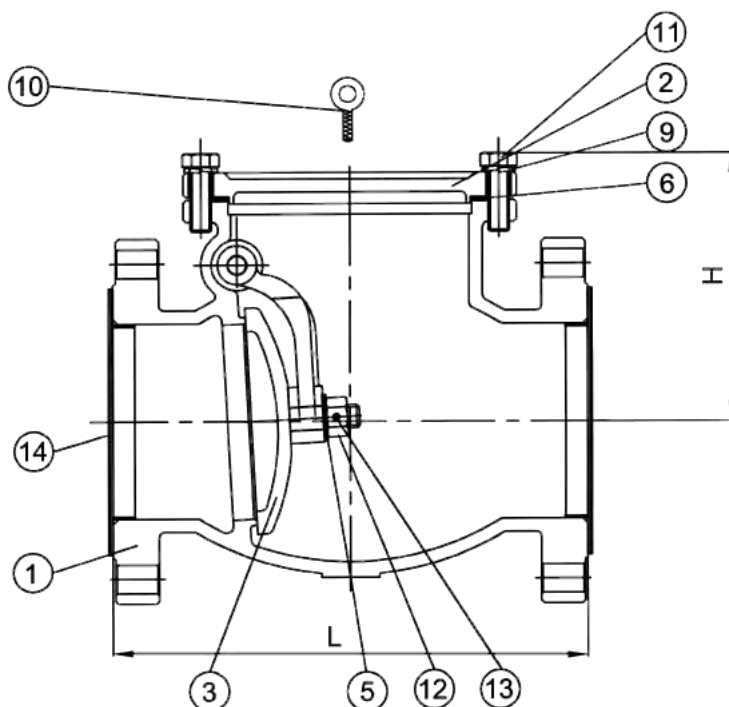

DIMENSIONS

		Unit:mm													
SIZE	IN	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"
	MM	15	20	25	32	40	50	65	80	100	125	150	200	250	300
L		115	120	125	180	200	230	290	310	350	400	480	500	600	700
H		63	66	75	85	85	110	135	135	170	170	210	315	376	1324

注意：逆止閥必須安裝在離泵口大約5*DN以外位置，避免產生振盪。

SC-150F 旋啟式法蘭逆止閥

產品特徵：

SPECIFICATIONS

*公稱壓力：1/2" ~24" 150LB

Working Pressure: 1/2" ~24" 150LB

*殼體厚度標準：ANSI B16.34

SHELL WALL THICKNESS: ANSI B16.34

*結構長度尺寸規範：ANSI B16.10

Face to Face Dimensions: ANSI B16.10

*法蘭端尺寸規範：ANSI B16.5

End Flange Dimensions: ANSI B16.5


*壓力試驗規範：API 598 Pressure Test: API 598



型號：SC-150F

MATERIALS LIST

ITEM	零件名稱PART NAME	材質MATERIAL		
1	BODY	CF8	CF8M	CF3M
2	COVER	CF8	CF8M	CF3M
3	DISC	CF8	CF8M	CF3M
4	SWING ARM	CF8	CF8M	CF3M
5	WASHER	A276-304/316/316L		
6	GASKET	V#1500/GRAPHITE/PTFE		
7	HINGE PIN	A276-304/316/316L		
8	PLUG	A276-304/316/316L		
9	SPRING WASHER	A276-304		
10	EYE BOLT	A36+ZN		
11	COVER BOLT	A1943-B8		
12	NUT	A194-8/A194-8M		
13	PIN	A276-304/316/316L		
14	COVER	PE		

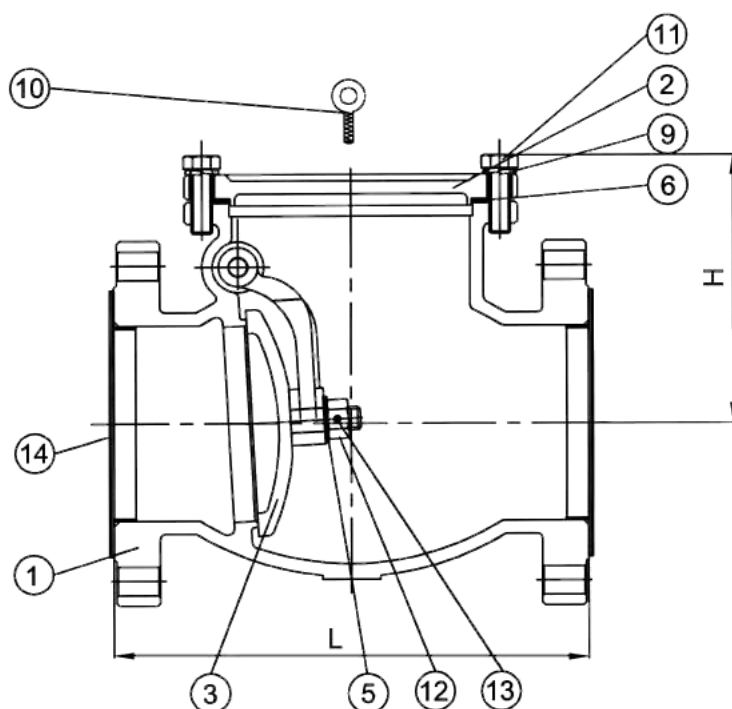

DIMENSIONS

Unit:mm

SIZE	IN	1/2"	3/4"	1"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
	MM	15	20	25	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L		108	117	127	165	203	216	241	292	330	356	495	622	699	787	864	978	978	1295
H		57	58	68	80	102	120	125	168	178	200	235	350	380	430	450	650	650	900

注意：逆止閥必須安裝在離泵口大約5*DN以外位置，避免產生振盪。