

SDC-16 懸吊式對夾逆止閥

產品特徵：

SPECIFICATIONS

*公稱壓力：2" ~26" 150LB

Working Pressure: 2" ~26" 150LB

*適用溫度範圍：-20 ~ 232°C

Temperature Range: -20 ~ 232°C

*連接方式: 對夾 End types: Wafer



*精密鑄造 Investment Casting



型號：SDC-16

MATERIALS LIST

ITEM	零件名稱PART NAME	材質MATERIAL
1	BODY	SUS304/SUS316
2	CLAPPER	SUS304/SUS316
3	RETAINER	SUS316
4	BUSH	SUS316
5	CLAPPER SEAT	NBR/VITON/PTFE/METAL
6	BODY SEAT	NBR/VITON/PTFE/METAL
7	O-BOLT	SUS304

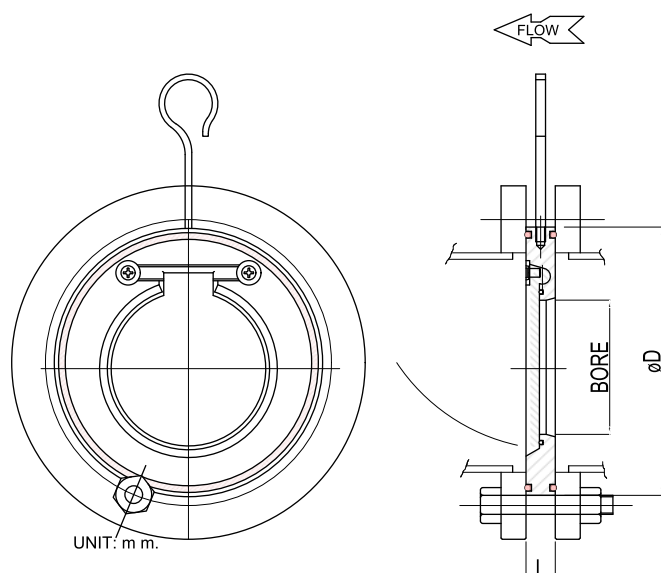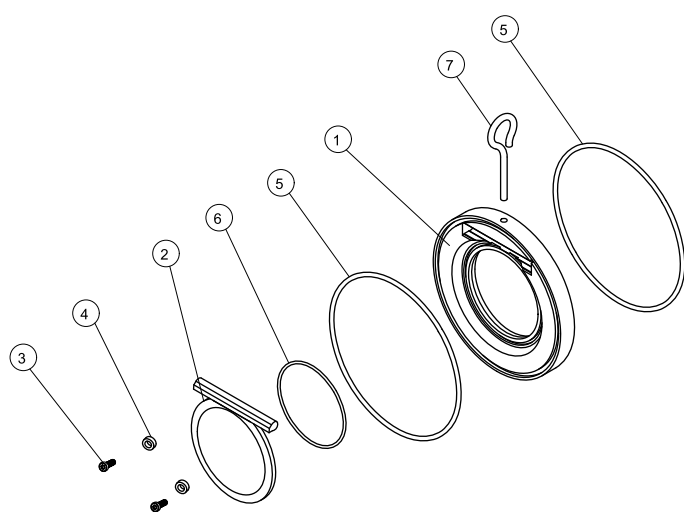

閥座適用工況選擇表

STAINLESS STEEL	SUS304 SUS316	SUS304 SUS316	SUS304 SUS316
SEAT	NBR	VITON	PTFE
FLUID	AIR.OIL.WATER &OTHERS	AIR.OIL.HOT WATER&OTHERS	AIR.OIL.STEA M&OTHERS
WORKING PRESSURE (MAX)(kaf/cm2)	14	12	12
FLUID TEMP(MAX°C)	80	250	200

DIMENSIONS

Unit:mm

SIZE	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"
BORE	30	42	50	72	93	113	142	190	212	260	306	358	408	450	485	520
D	104	124	134	174	190	220	278	340	409	448	510	548	605	657	715	770
L	14	14	14	18	18	20	27	29	35	38	45	55	65	70	70	70

注意：逆止閥必須安裝在離泵口大約5*DN以外位置，避免產生振盪。