

SV-L8LS/SV-L8S 型安全閥

產品特徵：

SPECIFICATIONS

*執行標準：DIN, ANSI, BS

Applicable Standards: DIN, ANSI, BS

*公稱壓力：1/2" ~ 2" PN16/25/40/CL150/CL300/CL600

Working Pressure: 1/2" ~ 2" PN16/25/40/CL150/CL300/CL600

*適用溫度範圍：-196 ~ 225°C/-196 ~ 300°C/-196 ~ 350°C/

-45 ~ 185°C/-40 ~ 200°C

Temperature Range: -196 ~ 225°C/-196 ~ 300°C/-196 ~ 350°C/

-45 ~ 185°C/-40 ~ 200°C

*閥體材質：CF8M/CF8/BRONZE


Body Material: CF8M/CF8/BRONZE



型號：SV-L8LS/SV-L8S

MATERIALS LIST

NO	TYPE		Safety Valve
	NAME		
1	閥體	VALVE BODY	SS304/316
2	閥座	VALVE SEAT	SS316
3	頂針	SPINDEL	SS304
4	彈簧座	SPRING SEAT	SS304
5	緩衝塞	DISC	SS316
6	閥蓋	CAP	SS304
7	彈簧	SPRING	SS304
8	螺帽	HANDEL	SS304
9	調整螺絲	ADJUST THREAD-ROD	SS304
10	把手	HANDEL	SS304

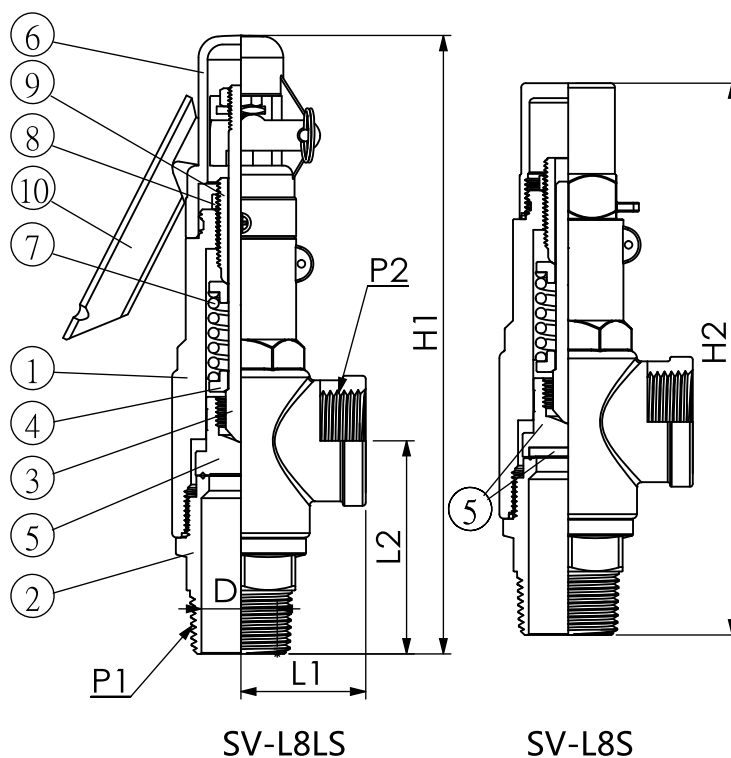

DIMENSIONS

unit:mm

P1	D	P2	L1	L2	H1	H2
1/2"	15	1"	41	66	200	179
3/4"	20	1"	41	65	100	177
1"	21	1"	41	71	205	183
1-1/4"	33	2"	65	101	285	261
1-1/2"	39	2"	65	101	285	261
2"	39	2"	65	104	288	265