

YS-800 Y型過濾器

產品特徵：

SPECIFICATIONS

*公稱壓力：1/4" ~ 3" 56Kgf/cm²

Working Pressure: 1/4" ~ 3" 800PSI

*適用溫度範圍：-20 ~ 180°C

Temperature Range: -20 ~ 180°C


*連接方式: 內螺紋 BSPT/NPT

End types: Female Threaded BSPT/NPT

*精密鑄造 Investment Casting



型號：YS-800

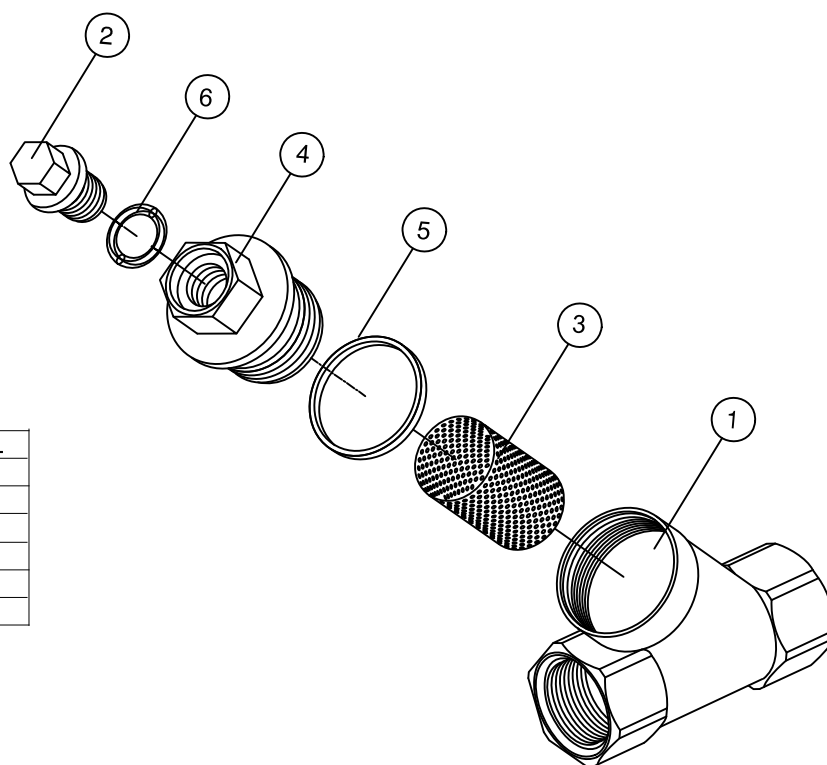


MATERIALS LIST

NO.	零件名稱	PART NAME	MATERIAL
1	本體	BODY	CF8M
2	絲堵	PLUG	CF8M
3	濾網	SCREEN	SS316
4	閥蓋	BONNET	CF8M
5	閥體密封	BODY SEAL	PTFE
6	O型圈	O-RING	VITON

DIMENSIONS

unit:mm

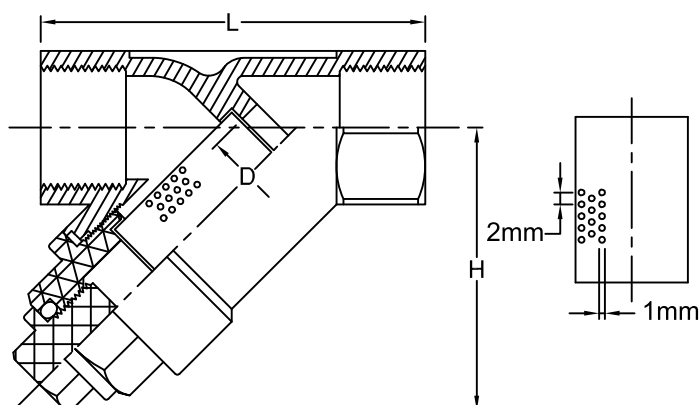

SIZE		L	H	D
DN8	1/4"	65.0	51.0	10.0
DN10	3/8"	65.0	51.0	12.0
DN15	1/2"	65.0	51.0	15.0
DN20	3/4"	80.0	60.0	20.0
DN25	1"	90.0	72.0	25.0
DN32	1-1/4"	105.0	77.0	32.0
DN40	1-1/2"	120.0	87.0	40.0
DN50	2"	140.0	103.0	50.0
DN65	2-1/2"	180.0	124.0	65.0
DN80	3"	200.0	143.0	80.0